



Mineral Insulated Thermocouple

M.I. Thermocouple Elements

Model: R2

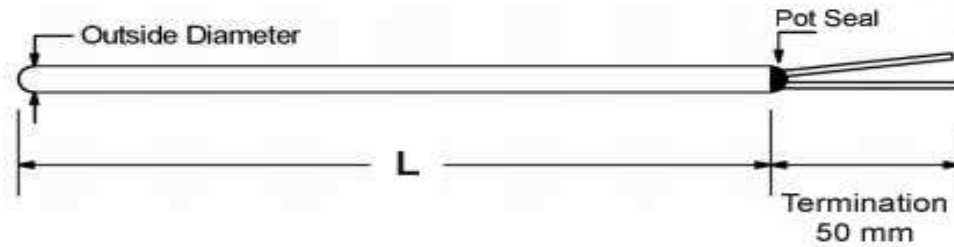

Optional Male Connector



Optional Female Connector



Configuration

1	Sheath Material
1	SS 304
2	SS 310
3	SS 316
5	Inconel 600

2	Calibration	
Standard Limits of Error		ACCURACY
A	J	0.75%
B	K	500°C + - 3°C / Above 0.75%

3	"L" Dimension
Specify "L" Length In mm	

4	Outside Diameter
1	1 mm
2	1.5 mm
3	3 mm
4	6 mm
5	8 mm

5	Junction Styles				
Element Description	Grounded	Ungrounded		Exposed	
	Common	Common	Isolated	Common	Isolated
Simplex	G		U		E
Duplex	D	F	H	I	M

6	Termination
1	3/8 " Split bare leads.
2	3 " Split & Color Coded leads.
3	Standard Male Plug (425 F)
4	Standard Female Jack (425 F)
5	Mini Male Plug (425 F)
6	Mini Female Jack (425 F)
7	Hi Temp. Male Plug (800 F)
8	Hi Temp. Female Jack (800 F)