


# RTD

## RTD With Thermowell Assembly (Straight Threaded)

Model: **S10**

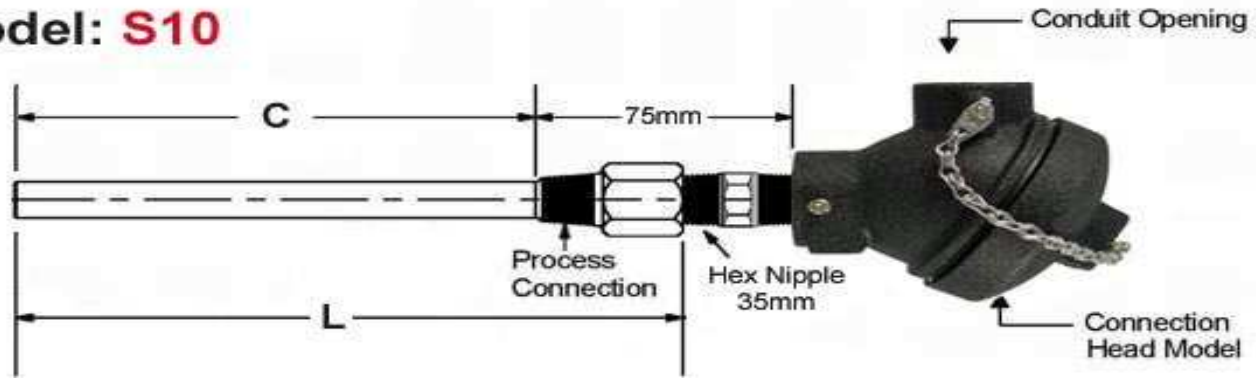

### Configuration

<b>1</b>	<b>Sheath Material</b>
1	SS 304
2	SS 316

<b>2</b>	<b>"L" Dimension</b>
Specify "L" Length In mm	

<b>4</b>	<b>Outside Diameter</b>
Specify "O.D." In mm	


<b>5</b>	<b>RTD Element Type</b>		
Ohms	Class A	Class B	Element
Pt100	1	3	Simplex / Duplex
Pt1000	2	4	Simplex / Duplex

<b>7</b>	<b>Connection Head Options</b>
1	None
2	4-20 mA Transmitter

<b>8</b>	<b>Conduit Opening</b>
1	½ " NPT
2	¾ " NPT

<b>10</b>	<b>Process Connection</b>
1	½ " NPT
2	¾ " NPT
3	1 " NPT

<b>3</b>	<b>RTD Wire Connection</b>
1	2 wire
2	3 wire
3	4 wire

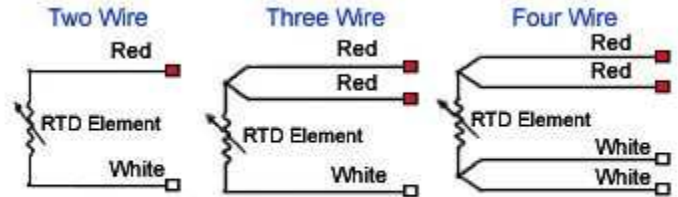

<b>6</b>	<b>Connection Head Model</b>
1	Cast Aluminum: Standard
2	Cast Aluminum: Mini
3	Flame Proof

<b>9</b>	<b>"C" Dimension</b>
1	Specify "C" Length In mm
2	Specify "C" Length O.D. In mm and I.D. In mm

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398