


RTD

RTD With Thermowell Assembly (Nipple-Union-Nipple)

Model: **S12**

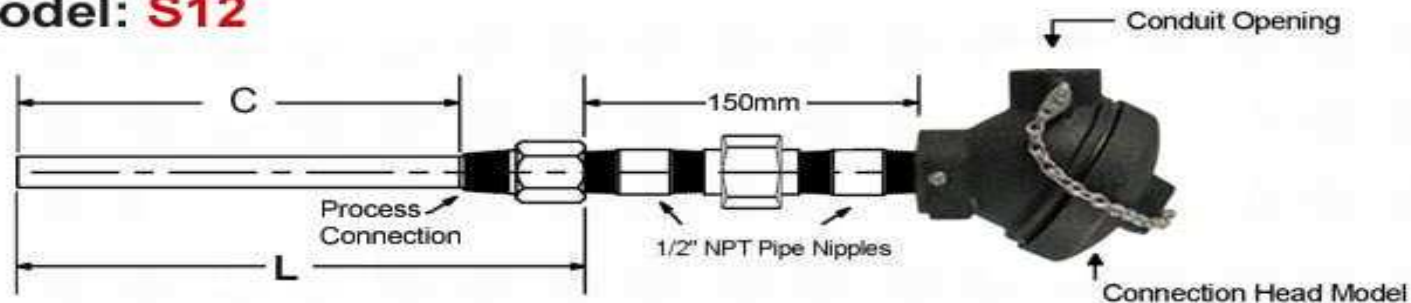

Configuration

1	Sheath Material
1	SS 304
2	SS 316

2	"L" Dimension
Specify "L" Length In mm	

4	Outside Diameter
Specify "O.D." In mm	


5	RTD Element Type		
Ohms	Class A	Class B	Element
Pt100	1	3	Simplex / Duplex
Pt1000	2	4	Simplex / Duplex

7	Connection Head Options
1	None
2	4-20 mA Transmitter

8	Conduit Opening
1	½" NPT
2	¾" NPT

10	Process Connection
1	½" NPT
2	¾" NPT
3	1" NPT

3	RTD Wire Connection
1	2 wire
2	3 wire
3	4 wire

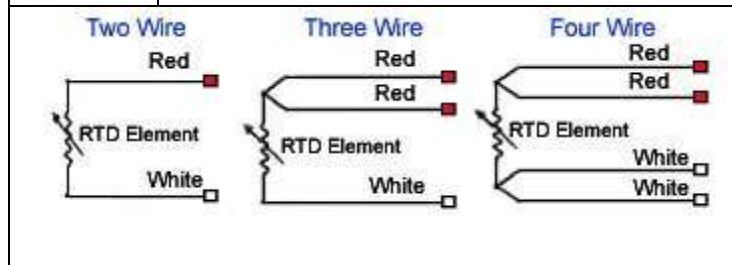

6	Connection Head Model
1	Cast Aluminum: Standard
2	Cast Aluminum: Mini
3	Flame Proof

9	"C" Dimension
1	Specify "C" Length In mm
2	Specify "C" Length O.D. In mm and I.D. In mm

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398