


RTD

RTD With Hex Nipple

Model: **S8**

Connection Head

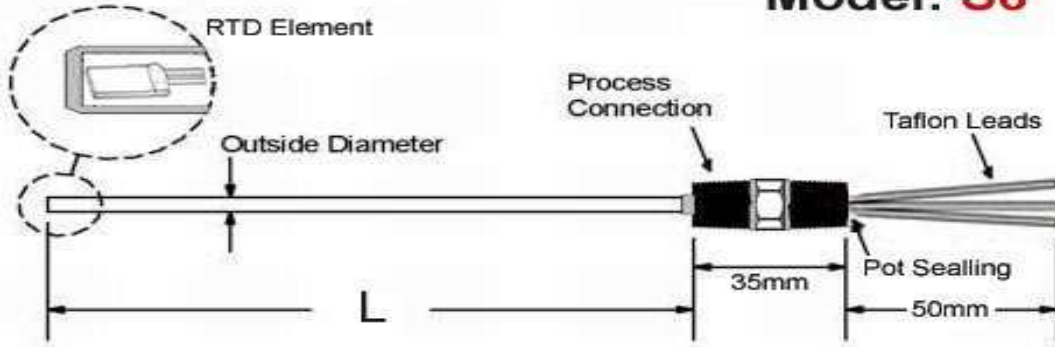

Configuration

| | |
|----------|------------------------|
| 1 | Sheath Material |
| 1 | SS 304 |
| 2 | SS 316 |

| | |
|--------------------------|----------------------|
| 2 | "L" Dimension |
| Specify "L" Length In mm | |


| | |
|----------------------|-------------------------|
| 4 | Outside Diameter |
| Specify "O.D." In mm | |

| | | | |
|----------|-------------------------|---------|------------------|
| 5 | RTD Element Type | | |
| Ohms | Class A | Class B | Element |
| Pt100 | 1 | 3 | Simplex / Duplex |
| Pt1000 | 2 | 4 | Simplex / Duplex |

| | |
|----------|--------------------------------|
| 7 | Connection Head Options |
| 1 | None |
| 2 | 4-20 mA Transmitter |

| | |
|----------|------------------------|
| 8 | Conduit Opening |
| 1 | ½ " NPT |
| 2 | ¾ " NPT |

| | |
|----------|----------------------------|
| 3 | RTD Wire Connection |
| 1 | 2 wire |
| 2 | 3 wire |
| 3 | 4 wire |

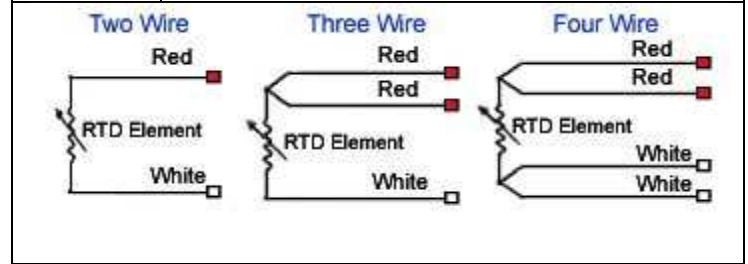

| | |
|----------|------------------------------|
| 6 | Connection Head Model |
| 1 | Cast Aluminum: Standard |
| 2 | Cast Aluminum: Mini |
| 3 | Flame Proof |

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398