


RTD

RTD With Thermowell Assembly (Stepped Threaded)

Model: **S9**

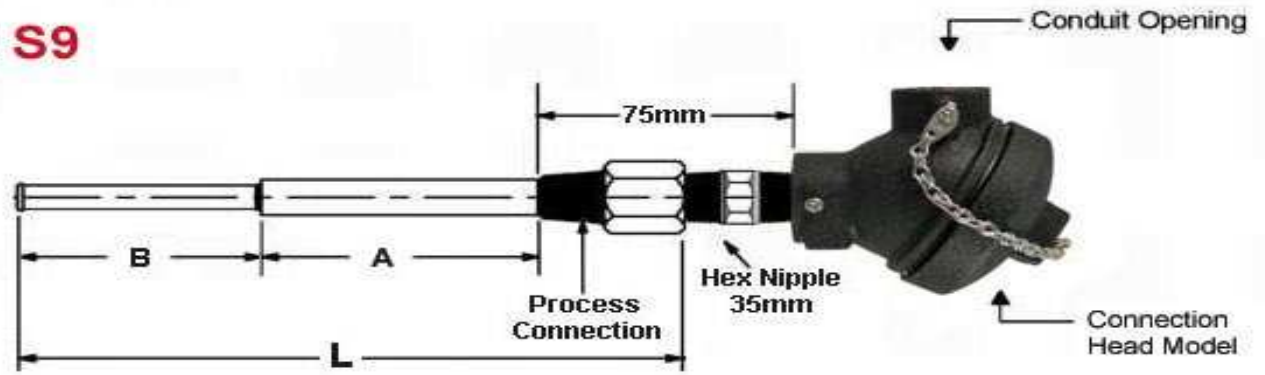

Configuration

| | |
|----------|-----------------|
| 1 | Sheath Material |
| 1 | SS 304 |
| 2 | SS 316 |

| | |
|--------------------------|---------------|
| 2 | "L" Dimension |
| Specify "L" Length In mm | |

| | |
|----------------------|------------------|
| 4 | Outside Diameter |
| Specify "O.D." In mm | |


| | | | |
|----------|------------------|---------|------------------|
| 5 | RTD Element Type | | |
| Ohms | Class A | Class B | Element |
| Pt100 | 1 | 3 | Simplex / Duplex |
| Pt1000 | 2 | 4 | Simplex / Duplex |

| | |
|----------|-------------------------|
| 7 | Connection Head Options |
| 1 | None |
| 2 | 4-20 mA Transmitter |

| | |
|----------|-----------------|
| 8 | Conduit Opening |
| 1 | ½ " NPT |
| 2 | ¾ " NPT |

| | |
|-----------|--|
| 10 | "B" Dimension |
| 1 | Specify "B" Length In mm |
| 2 | Specify "B" Length O.D. In mm and I.D. In mm |

| | |
|----------|---------------------|
| 3 | RTD Wire Connection |
| 1 | 2 wire |
| 2 | 3 wire |
| 3 | 4 wire |

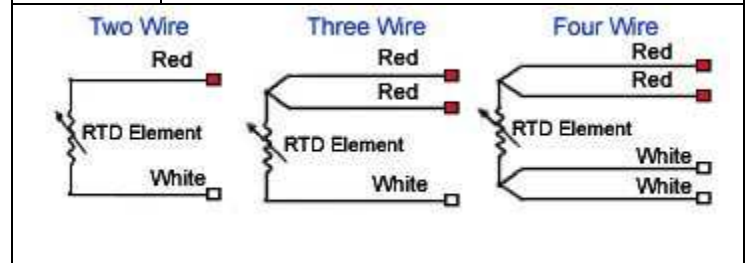

| | |
|----------|-------------------------|
| 6 | Connection Head Model |
| 1 | Cast Aluminum: Standard |
| 2 | Cast Aluminum: Mini |
| 3 | Flame Proof |

| | |
|----------|--|
| 9 | "A" Dimension |
| 1 | Specify "A" Length In mm |
| 2 | Specify "A" Length O.D. In mm and I.D. In mm |

| | |
|-----------|--------------------|
| 11 | Process Connection |
| 1 | ½ " NPT |
| 2 | ¾ " NPT |
| 3 | 1 " NPT |

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398