


# INDUSTRIAL THERMOCOUPLES

## Base Metal Thermocouple With Single Ceramic Protection Tube Assembly

**Model: M8**

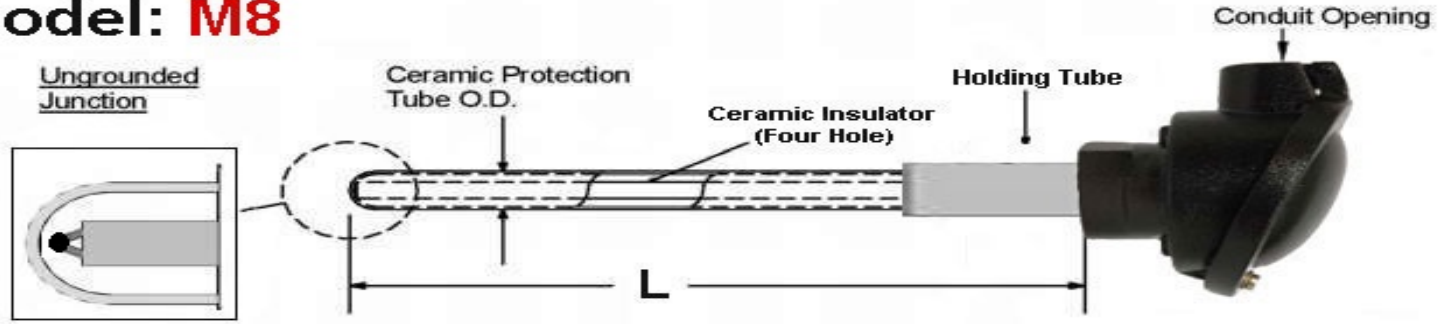

### Configuration

<b>1</b>	<b>Calibration</b>	
Standard Limits of Error	ACCURACY	
A	J	0.75%
B	K	500°C + - 3°C / Above 0.75%

<b>2</b>	<b>"L" Dimension</b>
Specify "L" Length In mm	

<b>3</b>	<b>Connection Head Options</b>
1	4-20mA Transmitter

<b>4</b>	<b>Conduit Opening</b>
1	1/2" NPT
2	3/4" NPT

<b>5</b>	<b>Connection Head Model</b>
A	Cast Aluminum Standard
B	Cast Aluminum Mini
C	Flame Proof

<b>6</b>	<b>Wire Dia.(mm)</b>	
	Simplex	Duplex
Dia.		
A	1.6 mm	
B	2mm	
C	2.5 mm	
D	3.2 mm	

<b>7</b>	<b>Ceramic Tube Size</b>
A	24 mm(O.D.)
B	20 mm (O.D.)
C	15 mm (O.D.)
D	12 mm (O.D.)
E	8 mm (O.D.)

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398